





Product Type: Compact intermediate relay

Product Name: SEB-RPM-1C

Product Description: Direct patch cord, isolated, compact wide-foot electromagnetic relay base, 16A,1C, configurable surge module

## Product Size

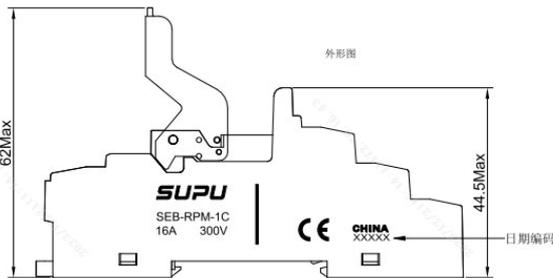

## Parameters

☞ SUPU ID	SEB-RPM-1C
☞ Protection Level	IP20
☞ Ambient temperature (operation)	-40°C~+85°C
☞ Mounting Type	DIN 35 rail mounting

☞ Color	Black
☞ Connection method	Push in spring connection
☞ Contact connection type	1C

## Technical data

☞ IEC Rated Current	16A
☞ IEC Rated Voltage	300V
☞ Overvoltage category	II
☞ Degree of pollution	2
☞ Stripping length	10-12/0.43Pin
☞ Wire Range	22-14/0.25-2.5AWG/mm2
☞ Dielectric withstand voltage	Coils to contacts : 4000V/S Contacts to contacts : 2500V/S
☞ Screw torque	/

## Commercial data

☞ Order No	SEB-RPM-1C
☞ Packing unit	PCS
☞ Minimum order quantity	10
☞ Single piece weight	46

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2026-02-28 13:00

The right to modify data belongs to SUPU.