




Product Type: Compact intermediate relay

Product Name: RE-230AC-1C

Product Description: Compact industrial relay, 2transfer contact 230V AC/ 12A

Product Size

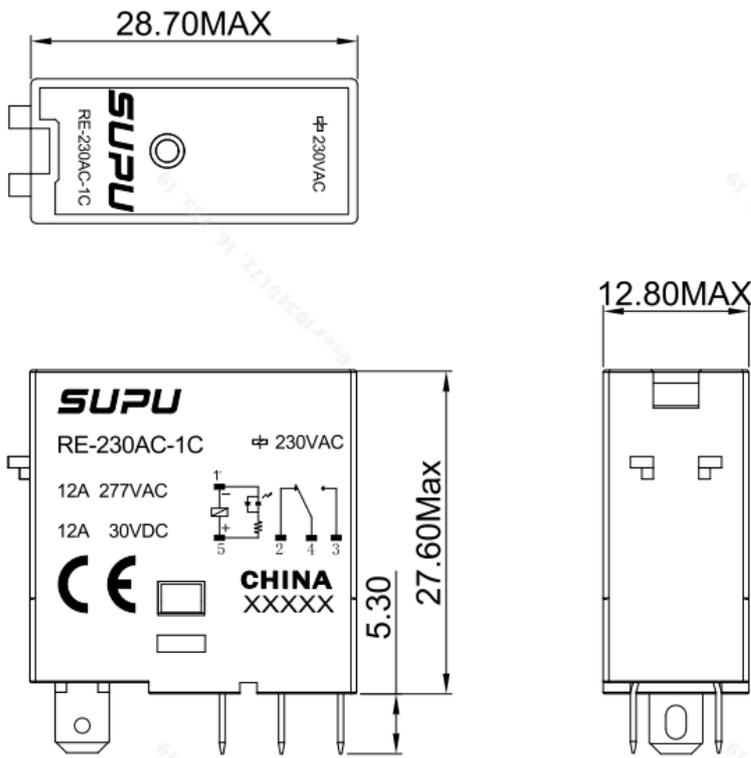

Parameters

| | |
|-----------------------------------|-------------|
| ☞ SUPU ID | RE-230AC-1C |
| ☞ Protection Level | IP40 |
| ☞ Ambient temperature (operation) | -40~+70°C |

| | |
|---------------------------------|--------------------|
| ☞ Ambient temperature (storage) | -40~+70°C |
| ☞ Mounting Type | optional |
| ☞ Contact material | silver alloy |
| ☞ Connection method | Push in connection |
| ☞ Contact connection type | 1C |

Technical data

| | |
|--------------------------------|--|
| ☞ IEC Rated Voltage | 230AC |
| ☞ Overvoltage category | II |
| ☞ Degree of pollution | 2 |
| ☞ Insulation Resistance | 1000MΩ (500VDC) |
| ☞ Dielectric withstand voltage | 5000VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 3000VAC 3min : BetweenContacts |
| ☞ Endurance | Mechanical 20 million cycles or more Electrical over 100,000 cycles |
| ☞ Operating voltage | ≤75% of rated voltage |
| ☞ Release Voltage | ≥10% of rated voltage |
| ☞ Maximum permissible voltage | 130% of rated voltage |
| ☞ Nominal power consumption | About1.1~1.4VA |
| ☞ Response time | 15ms or less |
| ☞ Release time | 20ms or less |
| ☞ Protective circuit | None |
| ☞ Status display | visual |
| ☞ Maximum switching power | 3300VA/360W |
| ☞ Rated load capacity | AC277V/12A DC30V/12A |

Commercial data

| | |
|--------------------------|-------------|
| ☞ Order No | RE-230AC-1C |
| ☞ Packing unit | 20 |
| ☞ Minimum order quantity | 20 |
| ☞ Single piece weight | 19g |

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat