




Product Type: Compact intermediate relay

Product Name:RET-230AC-2C

Product Description: Compact industrial relay, 2transfer contact 230VAC/ 8A,Test button

## Product Size

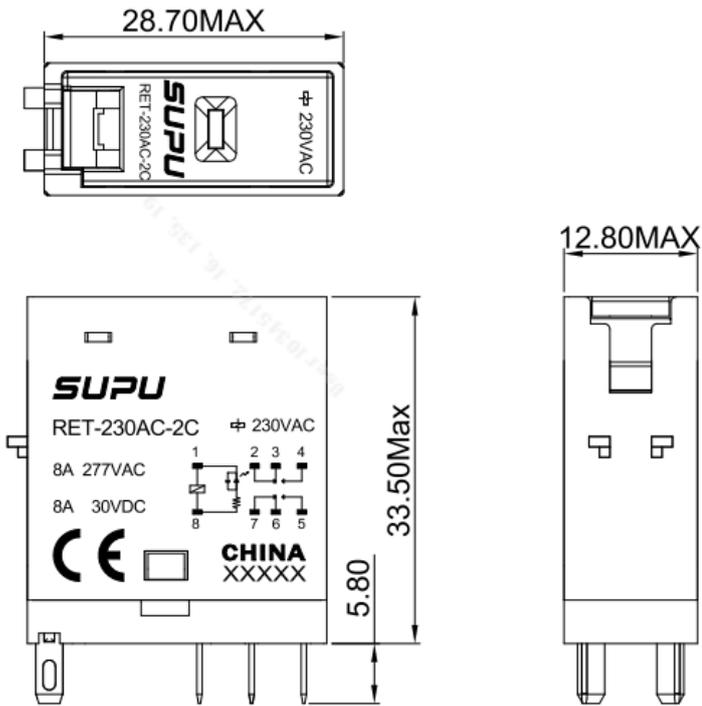

## Parameters

<p> SUPU ID</p>	RET-230AC-2C
<p> Protection Level</p>	IP40

☞ Ambient temperature (operation)	-25~+55°C
☞ Ambient temperature (storage)	-40~+70°C
☞ Mounting Type	optional
☞ Contact material	silver alloy
☞ Connection method	Push in connection
☞ Contact connection type	2C

## Technical data

☞ IEC Rated Voltage	230AC
☞ Overvoltage category	II
☞ Degree of pollution	2
☞ Insulation Resistance	1000MΩ (500VDC)
☞ Dielectric withstand voltage	5000VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 3000VAC 8min : BetweenContacts
☞ Endurance	Mechanical 20 million cycles or more Electrical over 100,000 cycles
☞ Operating voltage	≤75% of rated voltage
☞ Release Voltage	≥10% of rated voltage
☞ Maximum permissible voltage	130% of rated voltage
☞ Nominal power consumption	About1.1~1.4VA
☞ Response time	15ms or less
☞ Release time	20ms or less
☞ Protective circuit	None
☞ Status display	visual
☞ Maximum switching power	2200VA/240W

☞ Rated load capacity

AC277V/8A DC30V/8A

☞ Rated load current

8A

## Commercial data

☞ Order No

RET-230AC-2C

☞ Packing unit

20

☞ Minimum order quantity

20

☞ Single piece weight

19g

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat