




Product Type: High Current Branch Terminal

Product Name:SPDB185-2×35-5×16-4×10

Product Description: Connection method:Screw connection,IEC Rated Current:250A,IEC Rated Voltage:690V,Number of connections:12

Product Size

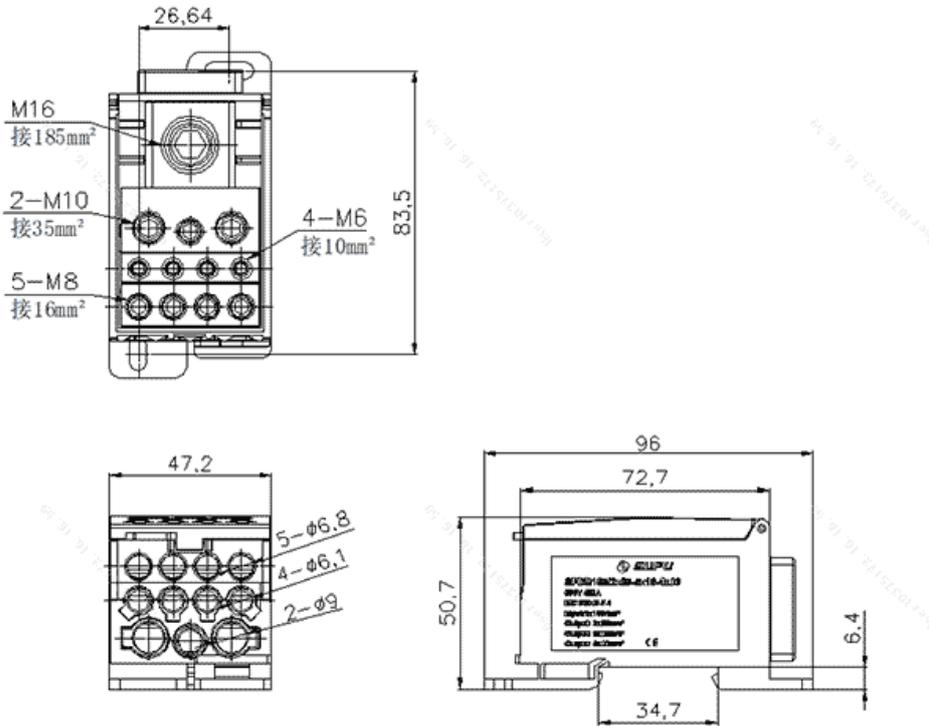

Parameters

| | |
|-------------------------|------------------------|
| ☞ SUPU ID | SPDB185-2x35-5x16-4x10 |
| ☞ Width | 47.2mm |
| ☞ Number of connections | 12 |
| ☞ Connection method | Screw connection |

| | |
|--|--------------|
| ☞ Protection Level | IP20 |
| ☞ Insulation material | PA66 |
| ☞ Insulation material group | I |
| ☞ Contact material | Copper alloy |
| ☞ Contact plating | Sn,Plated |
| ☞ Ambient temperature (operation) | -40°C~105°C |
| ☞ Ambient temperature (assembly) | -5°C~70°C |
| ☞ Ambient temperature (storage) | -25°C~60°C |
| ☞ Permissible humidity (storage/transport) | 30%~70% |

Technical data

| | |
|-------------------------------|--|
| ☞ IEC Rated Current | 400A |
| ☞ IEC Rated Voltage | 690V |
| ☞ Degree of pollution | 3 |
| ☞ Rated impulse voltage | 2.5KV |
| ☞ Locking screw Specification | M6/M8/M10/M16 |
| ☞ Locking screw torque | 2.5N·m/3N·m/3.5N·m/25N·m |
| ☞ Stripping length | 10-12mm/27-29mm |
| ☞ Connection capacity AWG | 2.5-10mm ² /2.5-16mm ² /2.5-35mm ² /95-185mm ² |
| ☞ 短路电流 (峰值) | 51 |
| ☞ 短路电流>1S | 24.5 |

Commercial data

| | |
|------------|------------------------|
| ☞ Order No | SPDB185-2x35-5x16-4x10 |
|------------|------------------------|

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2026-03-01 23:36

The right to modify data belongs to SUPU.