


Product Type: Spring-cage terminal

Product Name:TCT2.5-2-PV-GY

Product Description: Connection method:Spring-cage connection,IEC Rated Current:22A,IEC Rated Voltage:500V,Number of connections:6,Number of levels : 3,Cross section:28-12AWG

## Product Size

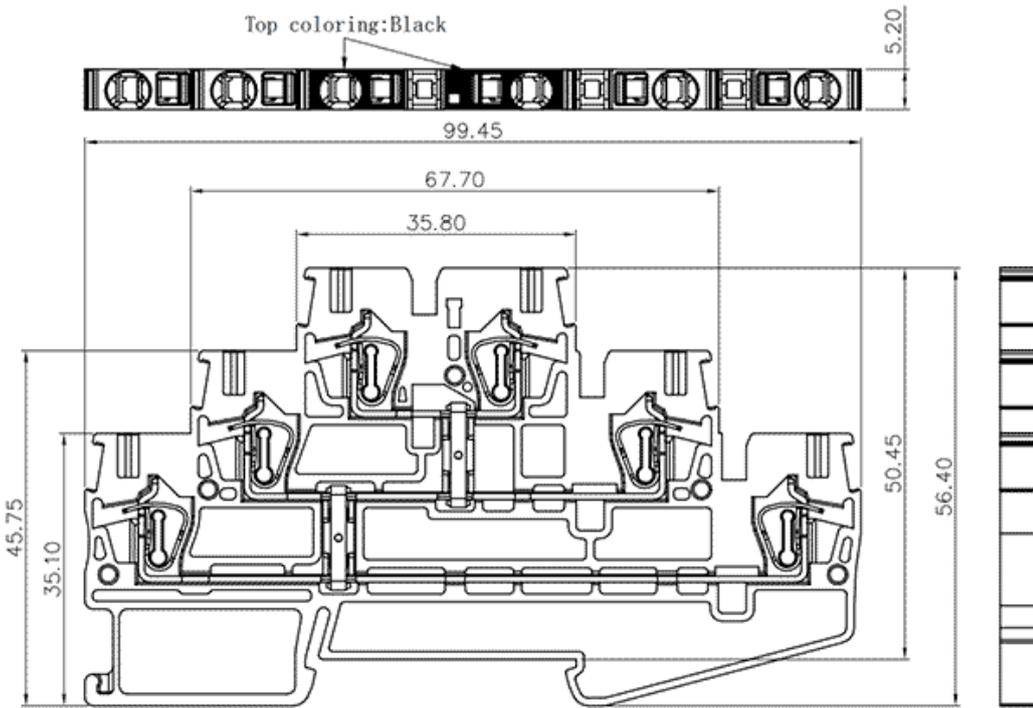

## Parameters

|                         |                |
|-------------------------|----------------|
| ☞ SUPU ID               | TCT2.5-2-PV-GY |
| ☞ Width                 | 5.2mm          |
| ☞ Number of levels      | 3              |
| ☞ Number of connections | 6              |

|  |                        |
|--|------------------------|
| ☞ Connection method                        | Spring-cage connection |
| ☞ Protection Level                         | IP20                   |
| ☞ Insulation material                      | PA66                   |
| ☞ Insulation material group                | I                      |
| ☞ Contact material                         | Copper alloy           |
| ☞ Contact plating                          | Sn,Plated              |
| ☞ Ambient temperature (operation)          | -40°C~105°C            |
| ☞ Ambient temperature (assembly)           | -5°C~70°C              |
| ☞ Ambient temperature (storage)            | -25°C~60°C             |
| ☞ Permissible humidity (storage/transport) | 30%~70%                |

## Commercial data

|            |                |
|------------|----------------|
| ☞ Order No | TCT2.5-2-PV-GY |
|------------|----------------|

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2026-02-26 22:06

The right to modify data belongs to SUPU.