


Product Type: Push-in spring terminal

## Product Name:TPU35-6-2.5-11-GY-A

Product Description: Connection method:Push-in connection,IEC Rated Current:105A,IEC Rated Voltage:1000V,Number of connections:11,Number of levels : 1,Cross section:16~1/0AWG

### Product Size

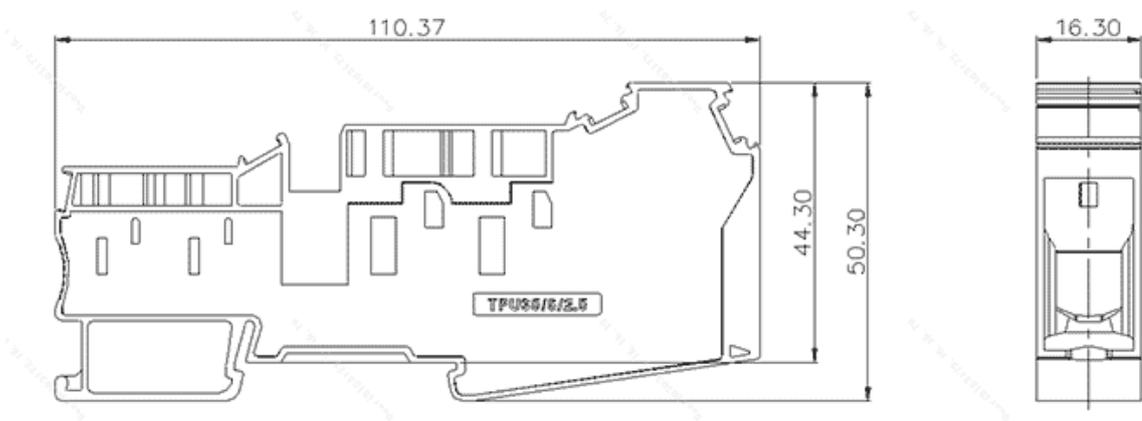

### Parameters

⌘ SUPU ID	TPU35-6-2.5-11-GY-A
⌘ Width	16.3mm
⌘ Number of levels	1
⌘ Number of connections	11

☞ Connection method	Push-in connection
☞ Protection Level	IP20
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Ambient temperature (operation)	-40°C~105°C
☞ Ambient temperature (assembly)	-5°C~70°C
☞ Ambient temperature (storage)	-25°C~60°C
☞ Permissible humidity (storage/transport)	30%~70%

## Technical data

☞ IEC Rated Current	105A
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III
☞ Degree of pollution	3
☞ Rated impulse voltage	8KV
☞ UL Rated Current	102A
☞ UL Rated Voltage	600V
☞ Conductor cross section rigid	1.5-50mm <sup>2</sup>
☞ Conductor cross section flexible	1.5-50mm <sup>2</sup>
☞ Conductor cross section flexible,with ferrule	1.5-35mm <sup>2</sup>
☞ Stripping length	18mm
☞ Use group	B/C

Commercial data

☞ Order No

TPU35/6/2.5-11-GY

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat