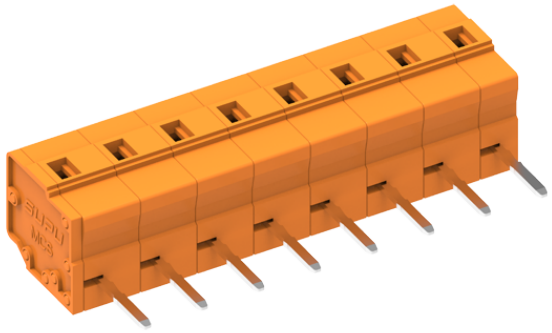

Product Type: Fixed terminal

Product Name:478475

Product Description: Pitch:7.62mm Rated Voltage：500V Rated Current:16A Connection method：Spring cage connection colour：customizable

Product Size

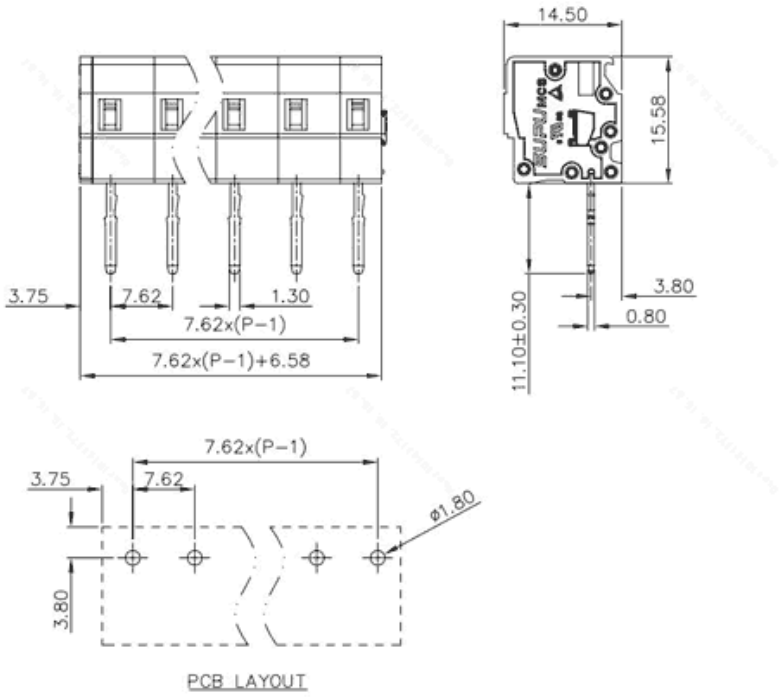

Parameters

SUPU ID	478475
Pitch	7.62
Number of levels	Single layer
Number of connections	15

Connection method	Spring cage connection
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	16A
IEC Rated Voltage	500V
Overvoltage category	III/III/ II
Degree of pollution	3 2 2
Rated impulse voltage	6.0KV 6.0KV 6.0KV
UL Rated Current	15A - 10A
UL Rated Voltage	300V - 300V
Conductor cross section rigid	0.2-2.5mm²
Conductor cross section flexible	0.2-2.5mm²
Conductor cross section flexible,with furrule	0.2-2.5mm²
Locking screw Specification	-
Locking screw torque	-
Fixed Screw Specification	-
Stripping length	8-9mm

Commercial data

Order No	478475

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

Date:2025-11-26 16:56

The right to modify data belongs to SUPU.