


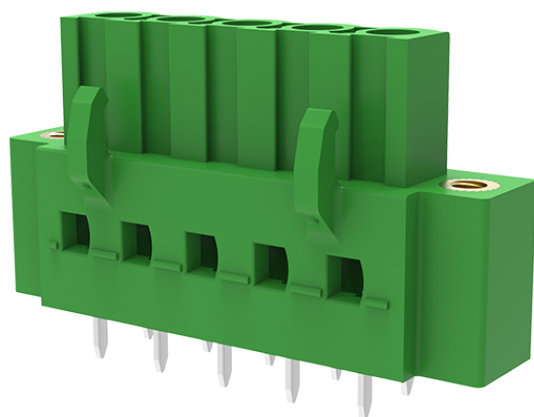


Product Type: Plug-in terminal-Plug

Product Name:MC-RU5.08SV21-F-0001

Product Description: Pitch:5.08mm Rated Voltage : 320V Rated Current:16A colour : customizable

Product Size

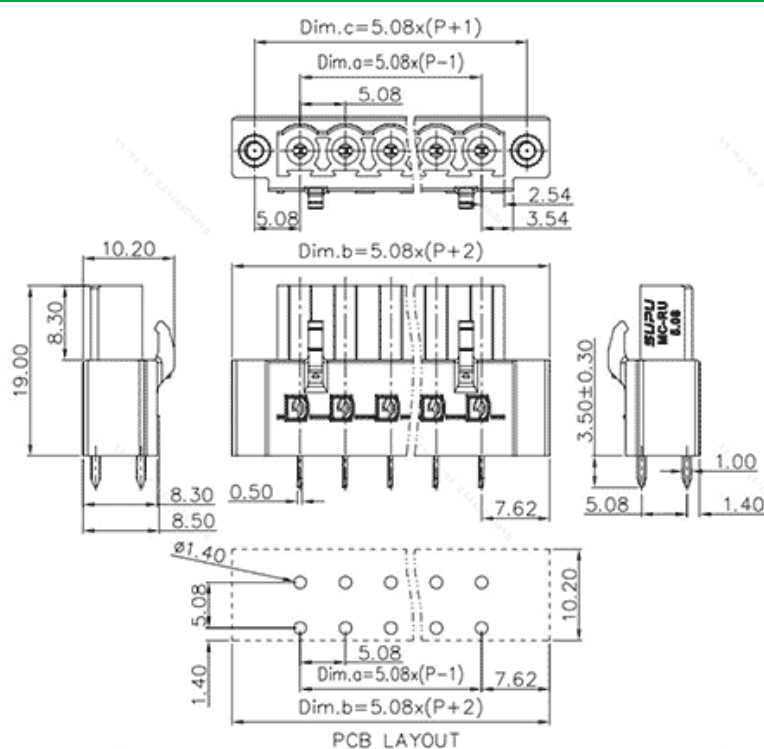

Parameters

⌘ SUPU ID	MC-RU5.08SV21-F-0001
⌘ Pitch	5.08
⌘ Number of levels	single layer
⌘ Number of connections	21

⌘ Connection method	-
⌘ Protection Level	IP20
⌘ Operating temperature range	-40~+105°C
⌘ Insulation material	PA66
⌘ Insulation material group	I
⌘ Contact material	Copper alloy
⌘ Contact plating	Sn,Plated
⌘ Color	Green/Black/Blue/Grey/Orange/Red

Technical data

⌘ IEC Rated Current	16A
⌘ IEC Rated Voltage	320V
⌘ Overvoltage category	III/III/ II
⌘ Degree of pollution	3 2 2
⌘ Rated impulse voltage	4KV 4KV 4KV
⌘ UL Rated Current	16A - 10A
⌘ UL Rated Voltage	250V - 300V
⌘ Conductor cross section rigid	-
⌘ Conductor cross section flexible	-
⌘ Fixed Screw Specification	M2.5
⌘ 固定螺钉扭矩	0.3N.M
⌘ Stripping length	-
⌘ Use group	B/C/D
⌘ Rated cross section	-

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat