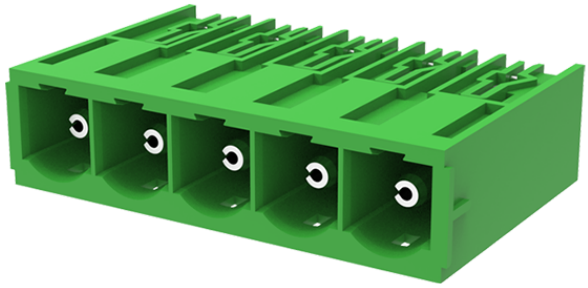

Product Type: Plug-in terminal-Socket

Product Name:MC-PH10.16H02-0001

Product Description: Pitch: 10.16mm Rated Voltage：1000V Rated Current: 76A

colour：customizable

Product Size

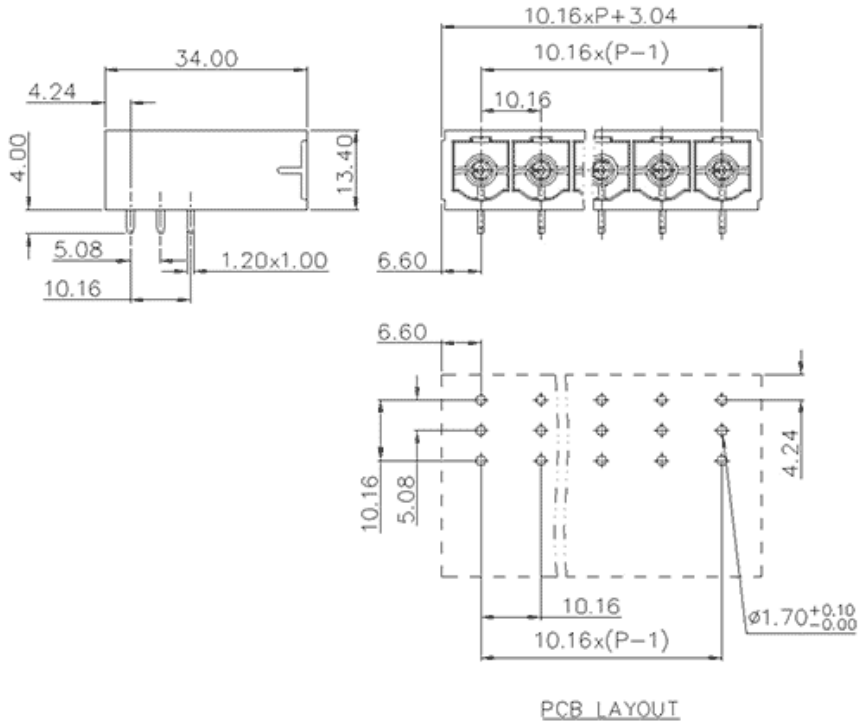

PCB LAYOUT

Parameters

SUPU ID	MC-PH10.16H02-0001
Pitch	10.16
Number of levels	Single layer
Number of connections	2

Connection method	-
Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Green/Black/Blue/Grey/Orange/Red

Technical data

IEC Rated Current	1000V
IEC Rated Voltage	76A
Overvoltage category	III III II
Degree of pollution	3 2 2
Rated impulse voltage	8.0KV 6.0KV 6.0KV
UL Rated Current	66A 66A 5A
UL Rated Voltage	300V 300V 600V
Use group	B/C/D

Commercial data

Order No	MC-PH10.16H02-0001

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China
Zip code: 315303
Switchboard: +86 574-63288158
Fax: +86 574-63288170
E-mail:supucontact@supu.cn
Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.